


TECHNICAL DATA SHEET

Thermoplastic Elastomer TPE - ESD safe

General notes:

- » **TPE** Olefinic Thermoplastic Elastomer, Permanent Antistatic, ESD Protection
- » Soft Plastic, was developed in order to achieve a surface resistance 10^8 - 10^9 Ohm in order to minimize the possibility of charge generation by wearing

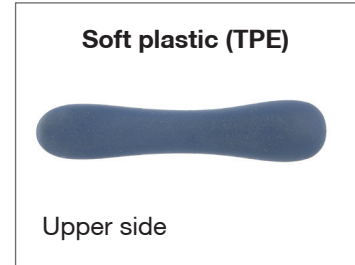


Mechanical properties

Tensile strength	2 MPa	ISO 527 ASTM D 638
Tensile elongation	10 +%	ISO 527 ASTM D 638
Hardness, Shore	65-75 A	D-785

Polypropylen compound PP - ESD safe

General notes:

- » **PP** polypropylene-compound
- » Hard Plastic, its function is to ground the metal tool (through the operators hand and the ESD wrist strap)

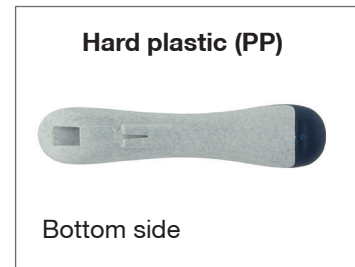

Mechanical properties

Tensile strength at break (5mm/min)	20 MPa	ISO 527 ASTM D 638
Elongation at break (5mm/min)	>10%	ISO 527 ASTM D 638
Tensile modulus +23°C	1650 MPa	ISO 527 ASTM D 638
Tensile strength +23°C	190 MPa	ISO 527 ASTM D 638
Izod-Impact strength (notched) +23°C	13 kJ/m	ISO 179/2C

Thermal properties

Temp. of defl. under load (1.80 MPa)	56 °C	ISO 75 ASTM D 648
VICAT softening point B (49 N)	70 °C	ISO 306

Other properties

Density	0.97 g/cm³	ISO 1183
---------	------------------------------	----------

This document contains information based on average values as obtained from the results of laboratory tests and observations made on the material. Ideal-Tek SA declines all responsibility from an improper use of the product described in this document.